


SECTION B-B

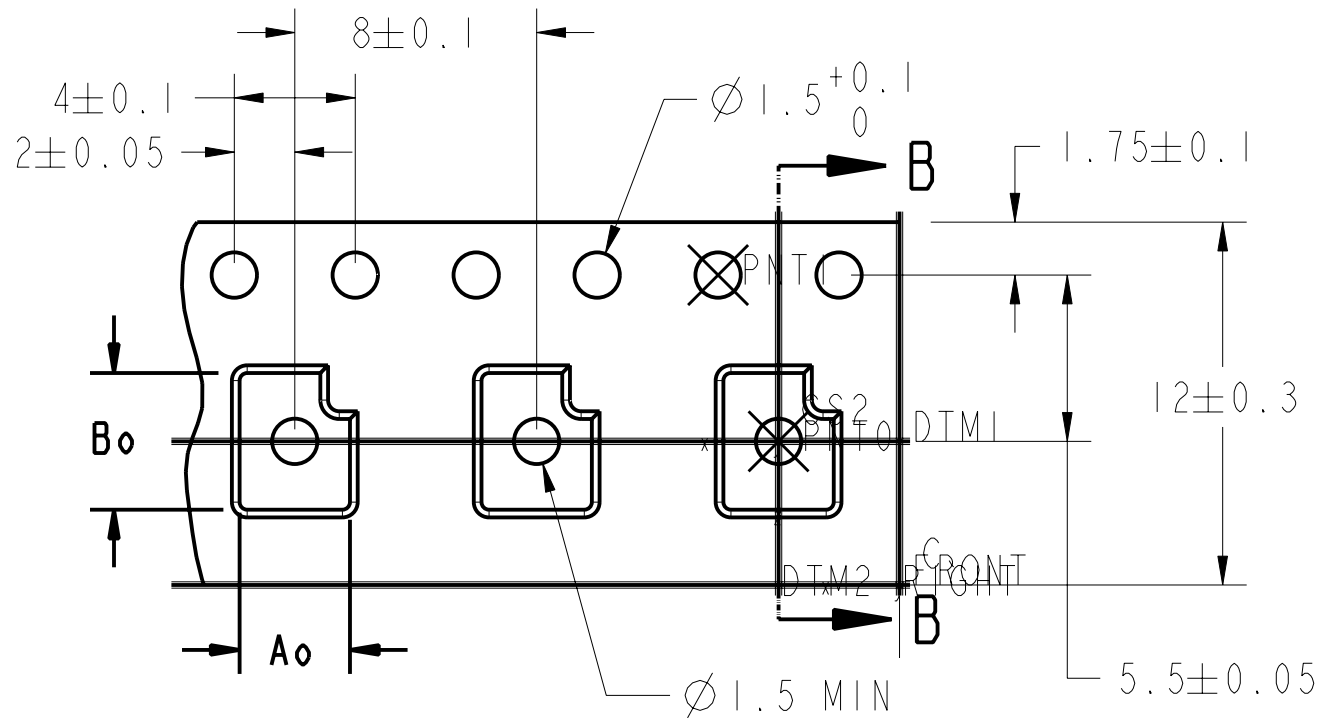



NOTES:

1. EIA-481 STANDARDS APPLY
2. POCKET POSITION RELATIVE TO SPROCKET HOLE MEASURED AS TRUE POSITION OF POCKET, NOT POCKET HOLE
3. DIE # WD20446

A ₀	3.650 [0.144]
B ₀	4.520 [0.178]
K ₀	2.080 [0.082]

TOLERANCES UNLESS OTHERWISE SPECIFIED	DRAWN BY K. WAGNER	DATE 07-Jan-03
±	CHECKED BY R. BAKER	DATE 07-Jan-03
±	DESIGNED BY .	DATE .
±	APPROVED BY .	DATE .
±	--- CONFIDENTIALITY ---	
DRAFT UNLESS NOTED: 0.5°	THIS DRAWING IS HEREBY DESIGNATED AS CONFIDENTIAL. INFORMATION ON IT IS PROPRIETARY Accutech AND SHALL NOT BE USED OR DISCLOSED TO THIRD PERSONS EXCEPT IN CONFORMITY WITH Accutech WRITTEN CONSENT.	
∠ ± 0.5°	UNLESS OTHERWISE NOTED: ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5M-1994 AND Accutech DRAFTING STANDARD NO. 1.0000.	
ALL DIMENSIONS ARE IN MM	SCALE: NTS	
SHEET OF	1	



THIRD ANGLE PROJECTION 

TITLE/DESCRIPTION
TAPE - CARR
R2258 T-R 12mm

PART NO./I.D. NO.
CT-9912H-154

MATERIAL/MOLD NO.
STATIC DISSIPATIVE
POLYSTYRENE

DRAWING NO.
01-020149

A SIZE

APPD. BY

X-470

ECO NO.
REV.
A