



SECTION A-A

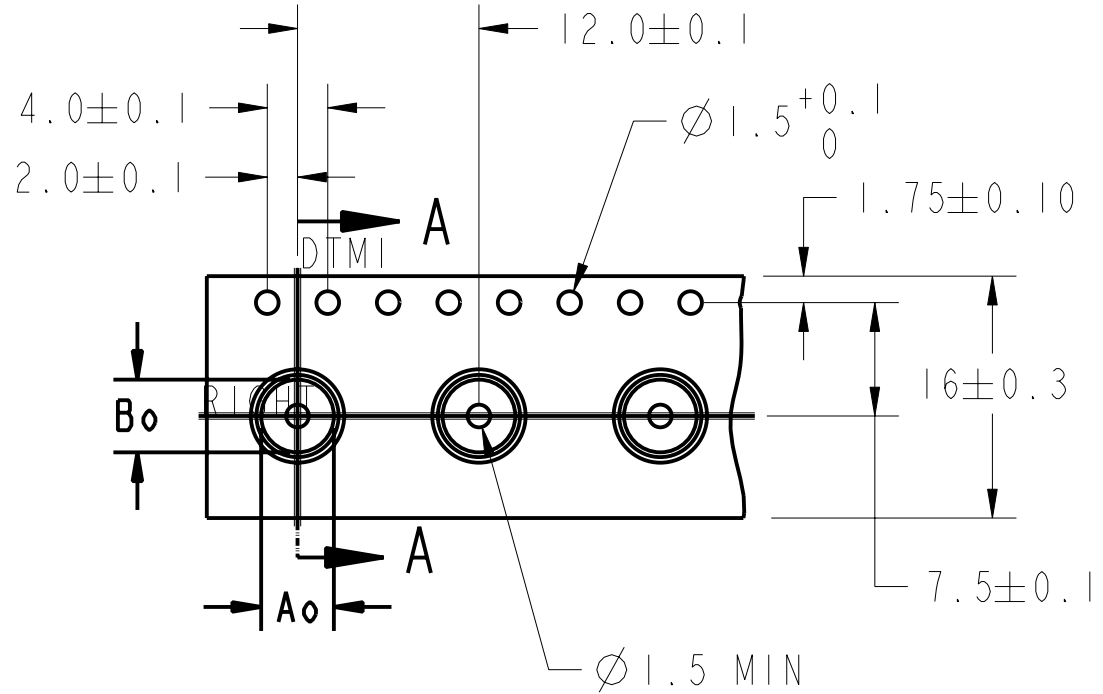

NOTES:

1. EIA-481 STANDARDS APPLY
2. POCKET POSITION RELATIVE TO SPROCKET HOLE MEASURED AS TRUE POSITION OF POCKET, NOT POCKET HOLE.
3. DIE # WD10250.

Ao	4.81 [.189]
Bo	4.81 [.189]
Ko	4.97 [.196]

TOLERANCES UNLESS OTHERWISE SPECIFIED	DRAWN BY K. WAGNER	DATE 22-Oct-02		A SIZE APPD. BY
±	CHECKED BY R. BAKER	DATE 02-Dec-02		
±	DESIGNED BY .	DATE .		
±	APPROVED BY .	DATE .		
±	--- CONFIDENTIALITY ---		THIRD ANGLE PROJECTION	X-381 ECO NO. REV. A
DRAFT UNLESS NOTED: 0.5°	THIS DRAWING IS HEREBY DESIGNATED AS CONFIDENTIAL. INFORMATION ON IT IS PROPRIETARY Accutech AND SHALL NOT BE USED OR DISCLOSED TO THIRD PERSONS EXCEPT IN CONFORMITY WITH Accutech WRITTEN CONSENT.		TITLE/DESCRIPTION	
± 0.5°			TAPE - CARR R1612-MF08V 16mm	
ALL DIMENSIONS ARE IN mm	UNLESS OTHERWISE NOTED: ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5M-1994 AND Accutech DRAFTING STANDARD NO. 1.0000.		PART NO./I.D. NO. CT-9916H-077	
SCALE: NTS	SHEET OF		MATERIAL/MOLD NO. STATIC DISSIPATIVE POLYSTYRENE	DRAWING NO. 01-019218