


SECTION A-A

- NOTES:
 1. EIA-481 STANDARDS APPLY
 2. POCKET POSITION RELATIVE TO SPROCKET HOLE MEASURED AS TRUE POSITION OF POCKET, NOT POCKET HOLE
 3. $P10 = P_0 \times 10$
 4. DIE # WD20383

A ₀ =	30.42MM [1.198]
B ₀ =	29.97MM [1.180]
K ₀ =	1.88MM [0.074]

TOLERANCES UNLESS OTHERWISE SPECIFIED	DRAWN BY K. Wagner	DATE 18-Oct-02
±	CHECKED BY .	DATE .
±	DESIGNED BY .	DATE .
±	APPROVED BY .	DATE .
±	--- CONFIDENTIALITY ---	
DRAFT UNLESS NOTED: 0.5°	THIS DRAWING IS HEREBY DESIGNATED AS CONFIDENTIAL. INFORMATION ON IT IS PROPRIETARY Accutech AND SHALL NOT BE USED OR DISCLOSED TO THIRD PERSONS EXCEPT IN CONFORMITY WITH Accutech WRITTEN CONSENT.	
± 0.5°	UNLESS OTHERWISE NOTED: ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5M-1994 AND Accutech DRAFTING STANDARD NO. 1.0000.	
ALL DIMENSIONS ARE IN mm	SCALE: NTS	
	SHEET OF	

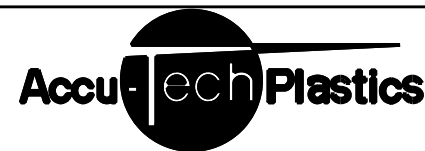

THIRD ANGLE PROJECTION

TITLE/DESCRIPTION

TAPE - CARR
R2168A 44mm

PART NO./I.D. NO.
CT-9944H-116

MATERIAL/MOLD NO.
STATIC DISSIPATIVE
POLYSTYRENE

DRAWING NO.
01-019189

A SIZE

APPD. BY

X-1574

ECO NO.
REV.

B